




TIP Model Numbers & Specification



Model					Model No.	Orifice Dia (mm)	Flow rate lpm @ bar							Spray angle @ bar	
DNR	DNM	DNK	DNH	DNB			10	100	150	200	300	400	500	150	500
●	●	●	●	●	0325	1.5	5.7	18.0	22.0	25.5	31.2	36.0	40.2	27	28
●	●	●	●	●	0332	1.4	5.7	18.0	22.0	25.5	31.2	36.0	40.2	35	36
●	●	●	●	●	0340	1.3	5.7	18.0	22.0	25.5	31.2	36.0	40.2	43	44
●	●	●	●	●	0425	1.7	7.6	24.0	29.4	33.9	41.6	48.0	53.7	27	28
●	●	●	●	●	0432	1.6	7.6	24.0	29.4	33.9	41.6	48.0	53.7	35	36
●	●	●	●	●	0440	1.5	7.6	24.0	29.4	33.9	41.6	48.0	53.7	43	44
●	●	●	●	●	0525	1.9	9.5	30.0	36.8	42.4	52.0	60.0	67.1	27	28
●	●	●	●	●	0532	1.8	9.5	30.0	36.8	42.4	52.0	60.0	67.1	35	36
●	●	●	●	●	0540	1.7	9.5	30.0	36.8	42.4	52.0	60.0	67.1	43	44
●	●	●	●	●	0625	2.1	11.4	36.0	44.1	50.9	62.4	72.0	80.5	27	28
●	●	●	●	●	0632	2.0	11.4	36.0	44.1	50.9	62.4	72.0	80.5	35	36
●	●	●	●	●	0640	1.9	11.4	36.0	44.1	50.9	62.4	72.0	80.5	43	44
●	●	●	●	●	0725	2.3	13.3	42.0	51.4	59.4	72.7	84.0	93.9	27	28
●	●	●	●	●	0732	2.2	13.3	42.0	51.4	59.4	72.7	84.0	93.9	35	36
●	●	●	●	●	0740	2.1	13.3	42.0	51.4	59.4	72.7	84.0	93.9	43	44
●	●	●	●	●	0825	2.5	14.3	45.3	55.5	64.1	78.5	90.6	101	27	28
●	●	●	●	●	0832	2.3	14.3	45.3	55.5	64.1	78.5	90.6	101	35	36
●	●	●	●	●	0840	2.2	14.3	45.3	55.5	64.1	78.5	90.6	101	43	44
●	●	●	●	●	0925	2.6	17.1	54.0	66.1	76.3	93.5	108	121	27	28
●	●	●	●	●	0932	2.5	17.1	54.0	66.1	76.3	93.5	108	121	35	36
●	●	●	●	●	0940	2.4	17.1	54.0	66.1	76.3	93.5	108	121	43	44
●	●	●	●	●	1125	3.1	21.4	67.7	83.0	95.7	117	135	151	27	28
●	●	●	●	●	1132	2.8	21.4	67.7	83.0	95.7	117	135	151	35	36
●	●	●	●	●	1140	2.7	21.4	67.7	83.0	95.7	117	135	151	43	44
●	●	●	●	●	1325	3.2	24.5	77.5	95.0	110	134	155	173	27	28
●	●	●	●	●	1332	3.1	24.5	77.5	95.0	110	134	155	173	35	36
●	●	●	●	●	1340	2.9	24.5	77.5	95.0	110	134	155	173	43	44
●	●	●	●	●	1525	3.5	28.6	90.5	111	128	157	181	202	27	28
●	●	●	●	●	1532	3.3	28.6	90.5	111	128	157	181	202	35	36
●	●	●	●	●	1540	3.2	28.6	90.5	111	128	157	181	202	43	44
●	●	●	●	●	1825	3.8	34.2	108	132	153	187	216	241	27	28
●	●	●	●	●	1832	3.6	34.2	108	132	153	187	216	241	35	36
●	●	●	●	●	1840	3.4	34.2	108	132	153	187	216	241	43	44
●	●	●	●	●	1925	3.9	35.7	113	138	160	196	226	253	27	28
●	●	●	●	●	1932	3.7	35.7	113	138	160	196	226	253	35	36
●	●	●	●	●	1940	3.6	35.7	113	138	160	196	226	263	43	44
●	●	●	●	●	2325	4.3	43.0	136	167	192	236	272	304	27	28
●	●	●	●	●	2332	4.1	43.0	136	167	192	236	272	304	35	36
●	●	●	●	●	2340	3.9	43.0	136	167	192	236	272	304	43	44

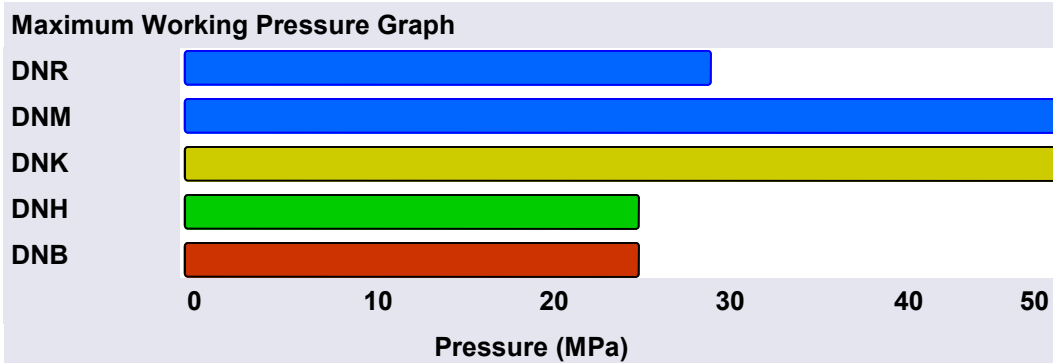

See separate chart for DNX tip specification