



Air Blaster


The Air Blaster is used for the removal of water, oil, dust, and swarf. They can also be used for cooling, cleaning, drying and for air curtains. They produce a wide uniform impact from one nozzle, and are quieter than other similar products.




Construction

Can be constructed from ABS resin, aluminium, and SS304

Model	Material	Weight	Heatproof Temperature	Maximum Service Pressure
AB15P	AB Resin	18	80	0.7
AB15A	Aluminium	59	200	0.4
AB15S	st.st304	165	200	0.4

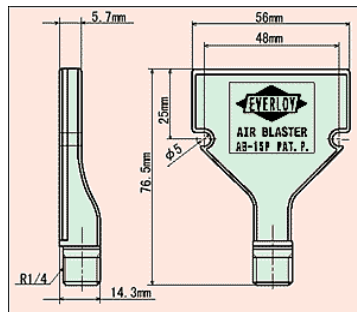

Model	Model Number	Min. orifice diam (mm)	Air flow rate (l/min (Nor.) @ MPa)					
			0.1	0.2	0.3	0.4	0.5	0.7
AB	15	0.9	230	350	470	590	710	950

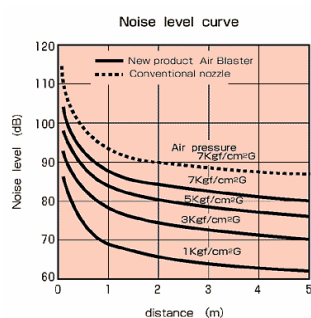

Condition Background noise : 50dB

