

CD 6 Self Cleaning Nozzles

Well defined flat or needle jet with a high impact
 Made in 316 stainless steel
 Spray angles available 0°, 45°, 60°, 80°

Reduction of pressure retracts an internal spring to purge contamination within the nozzle.





CD6

Applications:

Dirty water industrial washing and white washing

Wires and felts washing in paper industry

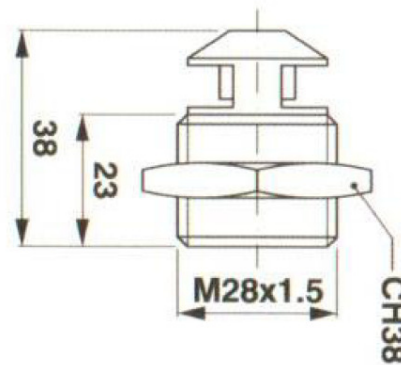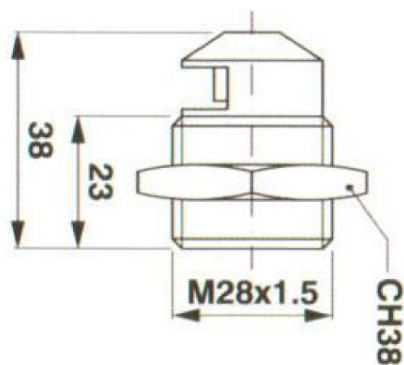

Type of Nozzle	Pressure							
	3	5	10	15	20	30	40	60
	Litres per minute at pressure							
CD6 - 1	1.0	1.3	1.8	2.2	2.6	3.1	3.6	4.4
CD6 - 2	3.3	4.2	6.1	7.5	8.6	10.5	12.2	15.0
CD6 - 3	4.5	5.8	8.4	10.3	11.9	14.5	16.8	20.6
CD6 - 4	7.5	9.7	14.0	17.1	19.8	24.2	28.0	34.3
CD6 - 5	9.7	12.5	17.9	21.9	25.3	31.0	35.8	44.0
CD6 - 6	11.5	14.6	21.0	25.7	29.7	36.4	42.0	51.5
CD6 - 7	12.1	15.5	22.1	27.0	31.2	38.2	44.2	54.2
CD6 - 8	13.9	18.2	25.4	31.0	36.0	44.0	51.0	62.3

