


D-V In Line Hollow cone

In line standard hollow cone with fine atomisation.

Low flow rate for more economical use.

Manufactured in Delvrin and hardened stainless steel for longer life.

Used in conjunction with ICS - HG bodies and caps

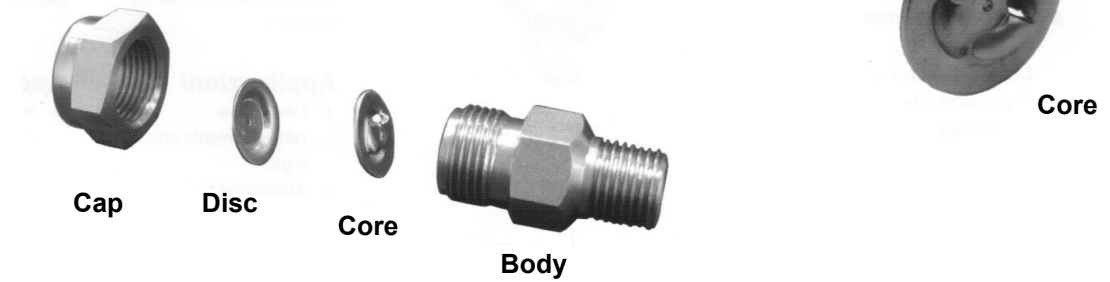

Disc model		Core Material			lpm @ bar			Spray angle @ bar		
Hardened ss	Standard ss	Delvrin	Standard ss	mm	3	5	10	3	5	10
IKD 1	ID 1	KV 23	~	1	0.48	0.60	0.84	52	52	52
IKD 1	ID 1	KV 25	~	1	0.65	0.84	1.18	50	50	50
IKD 1.2	ID 1.2	KV 23		1.2	0.57	0.66	0.93	70	75	77
IKD 1.2	ID 1.2	KV 23		1.2	0.86	1.00	1.57	56	60	65
1KD 1.2	ID 1.2	KV 45	IV 45	1.2	1.00	1.09	1.82	50	50	55
IKD 1.5	ID 1.5	KV 23		1.5	0.70	1.29	1.27	80	80	80
IKD 1.5	ID 1.5	KV 25		1.5	1.12	0.90	2.04	70	70	70
IKD 1.5	ID 1.5	KV 4.5	IV 45	1.5	1.54	1.42	2.81	70	70	70
~	ID 1.8	KV 28		0	1.42	1.99	2.59	75	75	82
IKD 2	ID 2	KV 25		2	1.61	1.80	2.93	80	80	80
IKD 2	ID 2	KV 45	IV 45	2	2.19	2.05	3.99	70	70	72

