

# TANKO® S10

The TANKO® S family offers significant potential savings, excellent cleaning results and product safety.

The S10 part of this TANKO® family is a media driven rotating surge cleaning head

It is one of the smallest rotating heads on the market with an overall head diameter of 10mm

AWH's state of the art design and their quality of manufacture ensures these excellent results required in today's process and manufacturing industries.

The S10's broader and accurate slits create consistent and large virtually round droplets. These droplets impacting on the vessel walls, combined with a smooth rotation speed ( thanks to the action of the double race ball bearings) creates the high impact required.





## Typical Applications

- ⇒ Small vessels and containers
- ⇒ Small access openings
- ⇒ Ducting
- ⇒ Combination fitting for medium tanks / areas



360°

TANKO® S10 Specification	
Type of cleaning	surge cleaning
Coverage	360°
Mode of drive	cleaning media driven
Drive support	double ball bearings
Installation Position	freely selectable
Max rec. cleaning diam.	0.3 - 0.8 mtrs
Operating pressure	0.5 - 7.0 bar
Connection	Thread M5 Weld-on
Max. working temp	230°C
Max. ambient temp	250°C

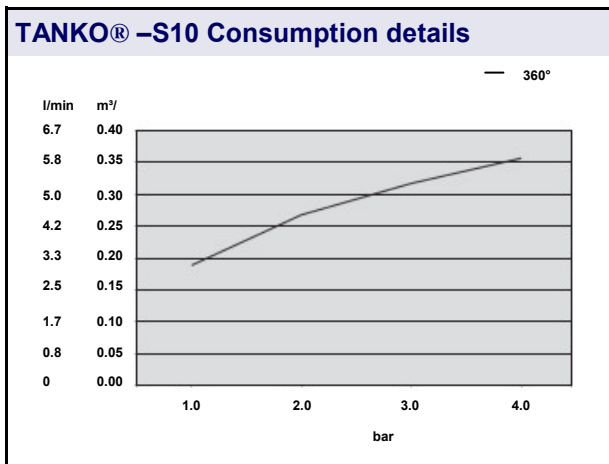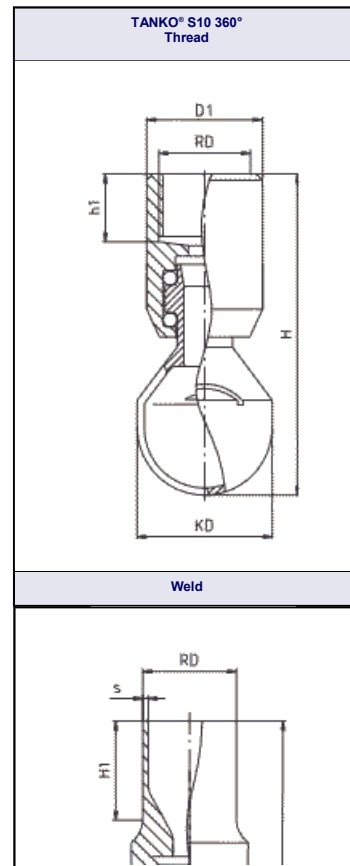

Connection	DN mm	RD ømm	S mm	KD ømm	H mm	h1 mm	h2 mm	d ømm
Weld on	6	8.0	1	10	53	27	~	~
Thread	6	M5	~	10	25	4	~	~

Refer to the AWH Catalogue connection on ICS web site for further information and the full CIP / tank cleaning experience  
[www.icsindustrialservices.co.uk](http://www.icsindustrialservices.co.uk)



ICS (INDUSTRIAL SERVICES) Ltd Tel: +44 (0) 1244 371167 Fax: +44 (0) 1244 372497  
 Email: [sales@icsindustrialservices.co.uk](mailto:sales@icsindustrialservices.co.uk) web: [www.icsindustrialservices.co.uk](http://www.icsindustrialservices.co.uk)