

# SC ROTATING NOZZLES

This self cleaning and self rotating CIP nozzle is used in the cleaning of tanks and vessels and will even operate when submerged under the residue in the bottom of a vessel.

This nozzle contains no ball bearings and minimum moving parts and is therefore subject to less wear and subsequent maintenance.




SC 1/4

SC 1/2

## Specification

- 360° spray coverage to vessels 2 meters in diameter.
- Will fit through a bung hole of 25mm
- Max operating pressure: 10 bar
- Weight: SC 1/4 - 60g  
SC 1/2 - 160g

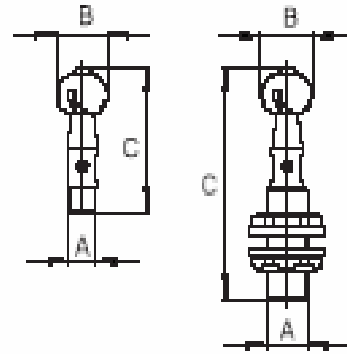

## Construction

SS303 or SS316

Code	A	B	C
SC1/4	1/4" BSPM	25mm	60mm
SC1/2	1/2" BSP	25mm	95mm

Model	Flow rate ltrs/min					
	2 bar	3 bar	4 bar	5 bar	7.5 bar	10 bar
SC	16	20	23	36	31	37

