


ASF3 Static filter

The ASF3 filter has a high performing efficiency owing to the ratio between the input area and filtration surface. The specific internal design forces the liquid into a swirling movement which distributes the impurities evenly over the total cartridge area and collects the solids into the base of the bowl. Therefore less maintenance is required.

The ALSF3 is the same model but manufactured from aluminium.

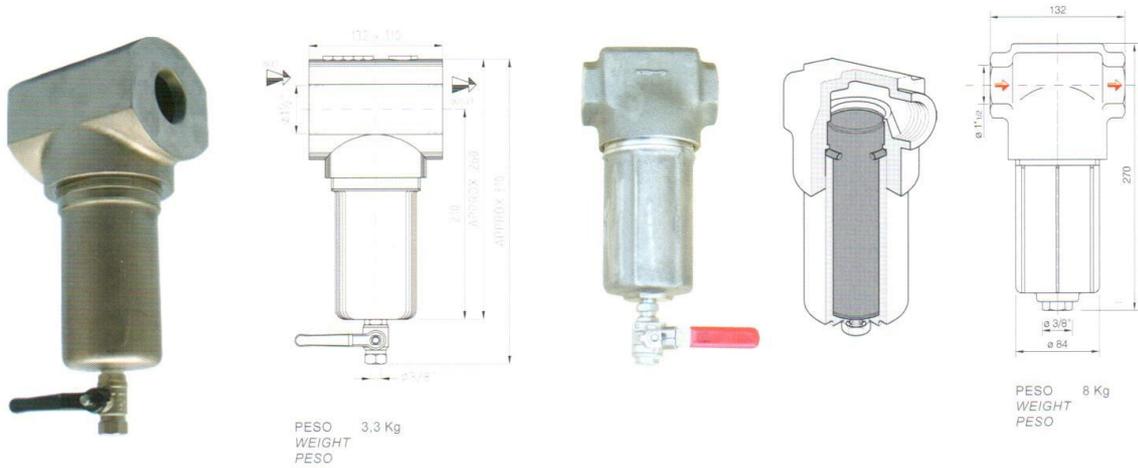

Materials

ASF3 cast 316ss suitable for heavy duty aggressive liquids and chemicals

ALSF3 hardened and tempered cast aluminium

Filter cartridge


Screen wire or light-perforated st.st

Flow rates

Maximum flow rates (m³/hr) values determined with a pressure drop of 0.2-0.3 barg, depending upon the filter media


FLOW DIAGRAM WITH 1 GR/LT OF SUSPENDED SOLID SCREEN WIRE

Data test with H₂O at 20°C

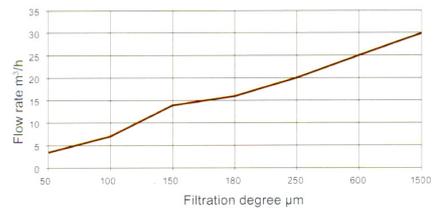

FLOW DIAGRAM WITH 1 GR/LT OF SUSPENDED SOLID SCREEN WIRE

Data test with H₂O at 20°C

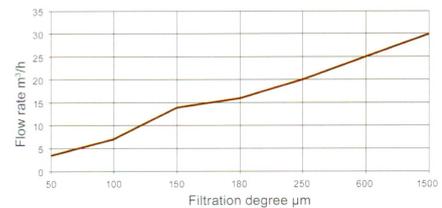

Technical Specification			
Operating Pressure	30 barg	Inlet/outlet flanges	1.1/2"
Filtration	50—1500 micron	Discharge ø	3/8"
Design pressure	45 barg	Drain valve	Manual ball
Max operating pressure	70°C		

ASF3:ALSF3 Maximum flow rates with clean water m³/hr

Filter Model	Cartridge Surface Area (dm ²)	1500µ 10 mesh	600µ 30 mesh	250µ 60 mesh	180µ 80 mesh	150µ 100 mesh	100µ 150 mesh	50µ 400 mesh
		Flow	Flow	Flow	Flow	Flow	Flow	Flow
ASF3	3.4	42	37	34	27	24	16	9
ALSF3	3.4	42	37	34	27	24	16	9



ICS (INDUSTRIAL SERVICES) Ltd
 Tel: +44 (0) 1244 371167 Fax: +44 (0) 1244 372497
 Email: sales@icsindustrialservices.co.uk
 web: www.icsindustrialservices.co.uk